

SITE DETAILS	STREET ADDRESS:	POI POI ST, BAMAGA, QLD, 4876
	R.P DESCRIPTION:	LOT 325 ON SP273361
	LOCAL AUTHORITY:	NORTH PENINSULA AREA REGIONAL COUNCIL
	SITE AREA:	925 m²

FLOOR PLAN B1 - COLOUR SCHEME 2

CONSTRUCT TO WIND CLASSIFICATION C2

KEY	SITE EXISTING
SYMBOL	DESCRIPTION
LB	LETTER BOX
VG	VEHICLE GATE
PG	PEDESTRIAN GATE
CL	SLAB SETOUT POINT
PS	PRIVACY SCREEN

AREA SCHEDULE	
NAME	AREA
CARPORT	37 m²
OUTDOOR LIVING	25 m²
PORCH	12 m²
PROPOSED FLOOR AREA	131 m²
WALKWAY	9 m²
GRAND TOTAL	213 m²



SITE EARTHWORKS & LANDSCAPE:
APPROX 25 cu.m. CUT 25 cu.m. FILL - BALANCED

BULK EARTHWORKS QUANTITIES ARE BASED ON BULK CUT AND TIGHT FILL VOLUMES.
THESE QUANTITIES ARE NOT GUARANTEED. THEY ARE PROVIDED FOR GUIDANCE ONLY.

BATTERS ARE PREFERRED AT 1:10 AND SHALL NOT EXCEED 1:4 IN ANY CIRCUMSTANCE.
THE PROVISION AND PLACEMENT OF 100mm OF TOPSOIL ACROSS THE PLATFORM AND BATTERS IS REQUIRED.
FINAL TRIM TO LOCAL GRADIENTS AND V-DRAINS IS TO BE COMPLETED TO ENSURE THAT NO PONDING OCCURS ON SITE PRIOR TO THE LAYING OF TURF.
TURF IS TO BE PROVIDED BY THE CONTRACTOR TO THE FULL EXTENT OF THE FRONT YARD AND TO THE EXTENT OF DISTURBED AREA INCLUSIVE OF THE BATTER TO THE REAR OF THE PROPERTY.


SITE PLAN

1 : 200

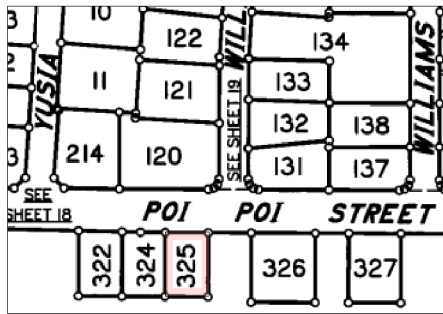

SITE LOCALITY

NOT TO SCALE

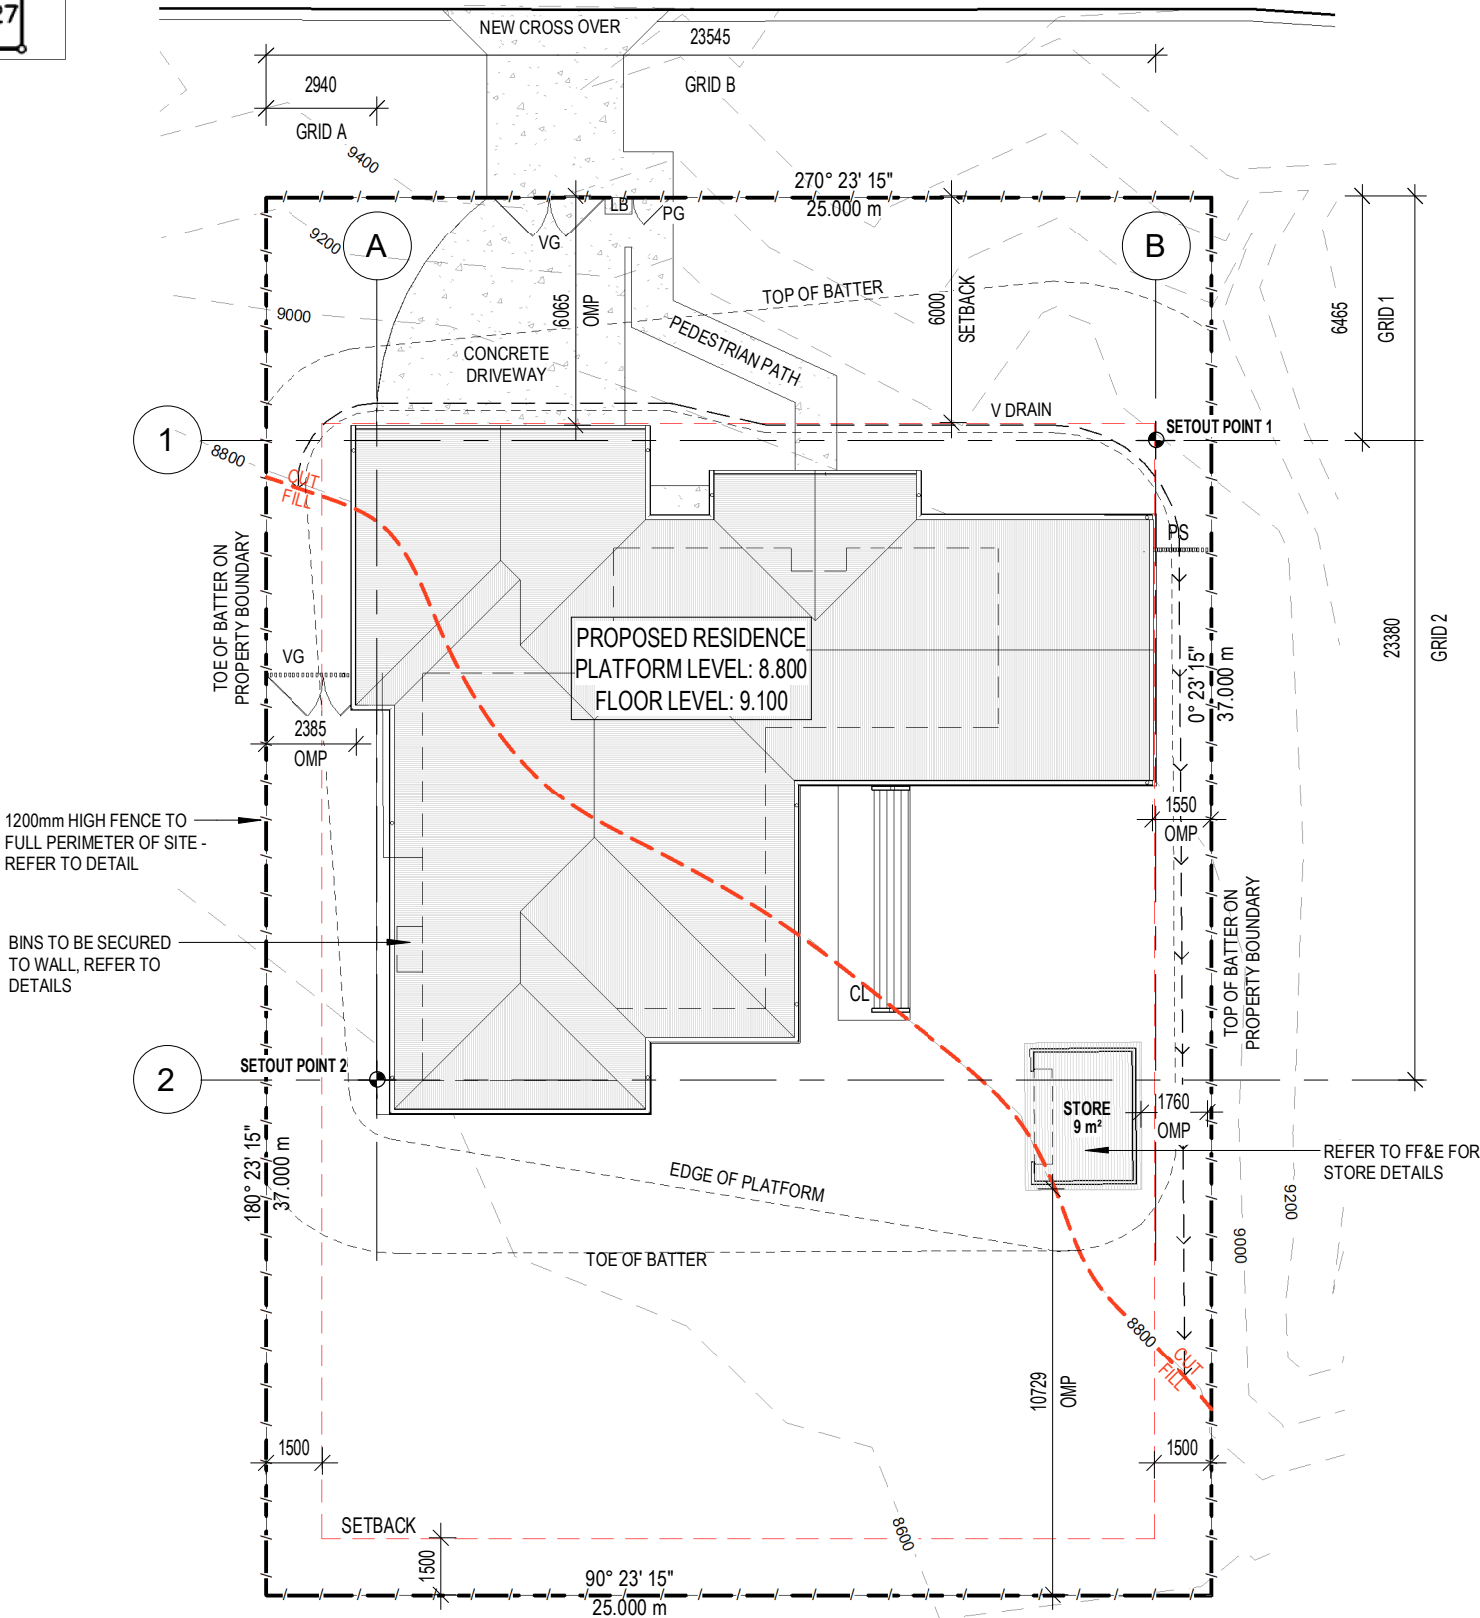

STRUXI DESIGN PTY LTD
p | 07 4638 4658 abn | 23115458958
e | struxi@struxi.com.au qbcc | 1080847
w | www.struxi.com.au
a | Suite12, Level 1/203 Margaret St Toowoomba Q 4350

COPYRIGHT
THIS INFORMATION REMAINS THE PROPERTY OF STRUXI DESIGN PTY LTD. AUTHORITY IS GRANTED FOR ONCE ONLY USE BY THE CLIENT AT ONLY THE SITE ADDRESS AS NOTED. UNAUTHORISED REPRODUCTION IS PROHIBITED BY LAW.
USE DEFINITION
PRELIMINARY - THE SHEET HAS BEEN ISSUED FOR PRELIMINARY USE ONLY. IT IS NOT TO BE USED FOR CONSTRUCTION.
CONSTRUCTION - THE SHEET HAS BEEN ISSUED FOR CONSTRUCTION. SUBJECT TO CONDITIONS OF BUILDING AND DEVELOPMENT APPROVALS.
THIS SHEET MUST BE READ IN CONJUNCTION WITH ALL OTHER DRAWINGS, SPECIFICATIONS, SCHEDULES AND THE L&E.



ISSUE HISTORY		
ISSUE	DESCRIPTION	DATE
F	FOR PRICING	24.03.2025
E	FOR CONSTRUCTION	04.09.2024
D	IFC	02.09.2024
C	TENDER ISSUE	30.05.2024
B	PRE TENDER ISSUE	28.05.2024
A	CLIENT REVIEW	29.04.2024

PROJECT NAME	
COMMUNITY HOUSING	
STREET ADDRESS	
POI POI ST, BAMAGA, QLD, 4876	
REAL PROPERTY DESCRIPTION	
LOT 325 ON SP273361	
CLIENT	
NORTH PENINSULA AREA REGIONAL COUNCIL	

SITE PLAN	
-----------	--

AUTHOR	
CEH	
DESIGNER	
OCK	
ORIGINAL SIZE	
297 x 420 - A3	
PRINT DATE	
3/24/2025 12:51:14 PM	
SCALE	
As indicated	

AUTHORISATION	
THIS DRAWING IS UNCONTROLLED WITHOUT DESIGNER'S SIGNATURE BELOW	
NORTH	

FOR CONSTRUCTION	
REFER TO 'USE DEFINITION' ABOVE	
PROJECT NO.	PHASE
232057	WD SBE-002
SHEET NO.	ISSUE
	F

STRUXI DESIGN PTY LTD